



PX-SP Series (Glass Fiber reinforced PP) Compact Magnetic Driven Pump With Self Priming Chamber

- Suitable for application of negative suction lift head.
- 6 models with flow rate up to 50 lit/min.
- Offering ceramic bearing & ceramic spindle as wetted end parts.
- Standard connections available in hose, thread and union.
- 1.2 m suction lift at S.G. 1.0 is available.
- Top mount on to drum can is acceptable for replacement of drum pump.

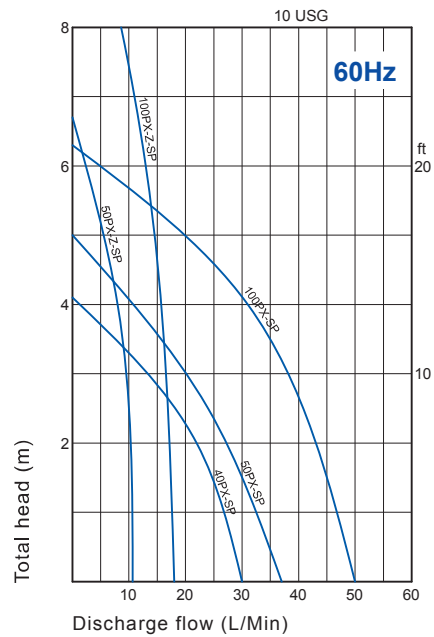

Pump performance curve

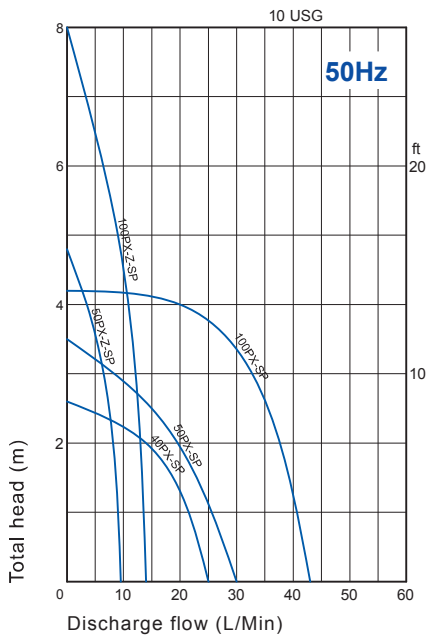

Specification table

Nominal speed : 2,500/3,000 r.p.m

Model	Connection method			Performance M-L/min, 50~60Hz		Max Suction Lift Head (m)	Motor
	Hose(mm)	Thread(°)	Union(A)	Max total head-max discharge	Specified head-specified discharge		Output x Input (W)
	In x Outlet	In x Outlet	In x Outlet				
40PX-SP	18 x 18	G3/4 x 3/4	16 x 16	2.6-25.0 / 4.1-30.0	2.0-14.0 / 2.0-22.0	1.2	20 - 40 / 45
50PX-Z-SP	18 x 18	G3/4 x 3/4	16 x 16	4.8-9.5 / 6.7-11.0	4.0-3.5 / 4.0-8.0	1.2	20 - 40 / 55
50PX-SP	20 x 20	G3/4 x 3/4	16 x 16	3.5-30.0 / 5.0-37.0	2.5-15.0 / 2.5-24.0	1.2	45 - 65 / 90
100PX-Z-SP	18 x 18	G3/4 x 3/4	16 x 16	8.0-14.0 / 11.0-18.0	5.0-9.0 / 6.0-13.0	1.2	45 - 80 / 95
100PX-SP	20 x 20	G3/4 x 3/4	16 x 16	4.2-43.0 / 6.3-50.0	4.2-20.0 / 4.0-31.0	1.2	65 - 90 / 120